

Concept X 37 - TXL Limbs - SCTR Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	HYPC
CDM Cam -	65%-75%	7 1/16	37 1/4	29	E*	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	28 1/2	F	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	28	G	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27 1/2	H	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27	I	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	26 1/2	J	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	26	K	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	26	K	One Size	61.55	41.00

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	HYPC
SCTR Cam - SPEC Modules	65%-75%	7 1/16	37 1/4	31 30	A	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	3/4 30	A-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	3/4 30	B+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/2 30	B	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/4 30	B-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/4 30	C+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	29 3/4	C	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	29 3/4	C-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	29 1/2	D+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	29 1/4	D	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	29 1/4	D-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	29 28	E+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	3/4 28	E	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	3/4 28	E-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/2 28	F+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/4 28	F	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/4 28	F-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27 3/4	G+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27 3/4	G	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27 1/2	G-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27 1/4	H+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27 1/4	H	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	27 26	H-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	3/4 26	I+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	3/4 26	I	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/2 26	I-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/4 26	J+	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4	1/4	J-	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4		J	One Size	61.55	41.00
	65%-75%	7 1/16	37 1/4		K+	One Size	61.55	41.00

65%-75%	7 1/16	37 1/4	26 25	K	One Size	61.55	41.00
65%-75%	7 1/16	37 1/4	3/4 25	K-	One Size	61.55	41.00
65%-75%	7 1/16	37 1/4	3/4 25	L+	One Size	61.55	41.00
65%-75%	7 1/16	37 1/4	1/2 25	L	One Size	61.55	41.00
65%-75%	7 1/16	37 1/4	1/4 25	L-	One Size	61.55	41.00
65%-75%	7 1/16	37 1/4	1/4 25	M+	One Size	61.55	41.00
65%-75%	7 1/16	37 1/4	24 3/4	M	One Size	61.55	41.00
65%-75%	7 1/16	37 1/4		M-	One Size	61.55	41.00

*=Shipped Module Position

Model: Concept X 37

Model Year: 2025

Pocket: B6

Pocket Dowel: B2

Rocker: 21

Limb: TXL


Limb Bolt Length: 1.75" SHCS

Roller Mount #31

Stealth Shot Bar: 4.88"

String Model: CX0

Date: 4/22/25

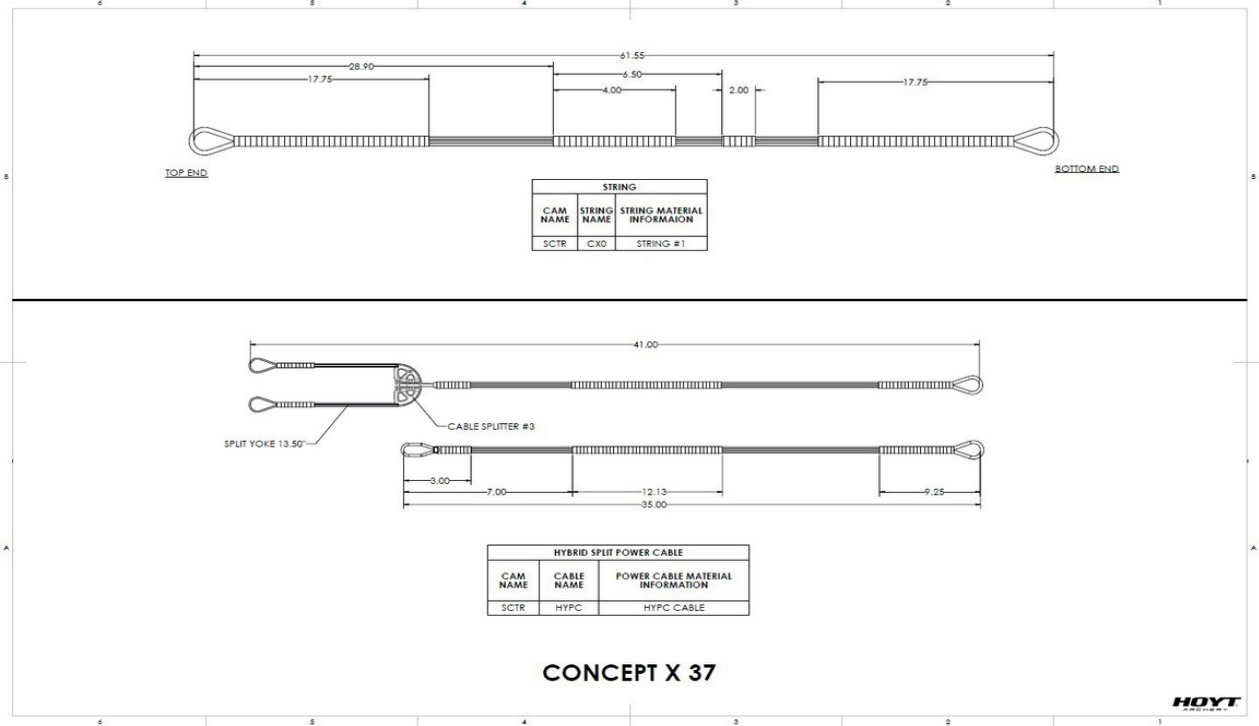

Concept X 40 - TXL Limbs - SCTR Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	HYPC
CDMOTR Cam -	65%-75%	7 5/16	40 3/16	30	E*	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	29 1/2	F	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	29	G	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28 1/2	H	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28	I	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	27 1/2	J	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	27	K	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	27	K	One Size	64.55	44.00

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	HYPC
SCTR Cam - SPEC Modules	65%-75%	7 5/16	40 3/16	32 31	A	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	3/4 31	A-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	3/4 31	B+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/2 31	B	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/4 31	B-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/4 31	C+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	30 3/4	C	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	30 3/4	C-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	30 1/2	D+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	30 1/4	D	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	30 1/4	D-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	30 29	E+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	3/4 29	E	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	3/4 29	E-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/2 29	F+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/4 29	F	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/4 29	F-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28 3/4	G+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28 3/4	G	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28 1/2	G-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28 1/4	H+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28 1/4	H	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	28 27	H-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	3/4 27	I+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	3/4 27	I	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/2 27	I-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/4 27	J+	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16	1/4	J-	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16		J	One Size	64.55	44.00
	65%-75%	7 5/16	40 3/16		K+	One Size	64.55	44.00

65%-75%	7 5/16	40 3/16	27 26	K	One Size	64.55	44.00
65%-75%	7 5/16	40 3/16	3/4 26	K-	One Size	64.55	44.00
65%-75%	7 5/16	40 3/16	3/4 26	L+	One Size	64.55	44.00
65%-75%	7 5/16	40 3/16	1/2 26	L	One Size	64.55	44.00
65%-75%	7 5/16	40 3/16	1/4 26	L-	One Size	64.55	44.00
65%-75%	7 5/16	40 3/16	1/4 26	M+	One Size	64.55	44.00
65%-75%	7 5/16	40 3/16	25 3/4	M	One Size	64.55	44.00
65%-75%	7 5/16	40 3/16		M-	One Size	64.55	44.00

*=Shipped Module Position

Model: Concept X 40

Model Year: 2025

Pocket: B6

Pocket Dowel: B2

Rocker: 21

Limb: TXL


Limb Bolt Length: 1.75" SHCS

Roller Mount #31

Stealth Shot Bar: 5.25"

String Model: CX0

Date: 4/22/25

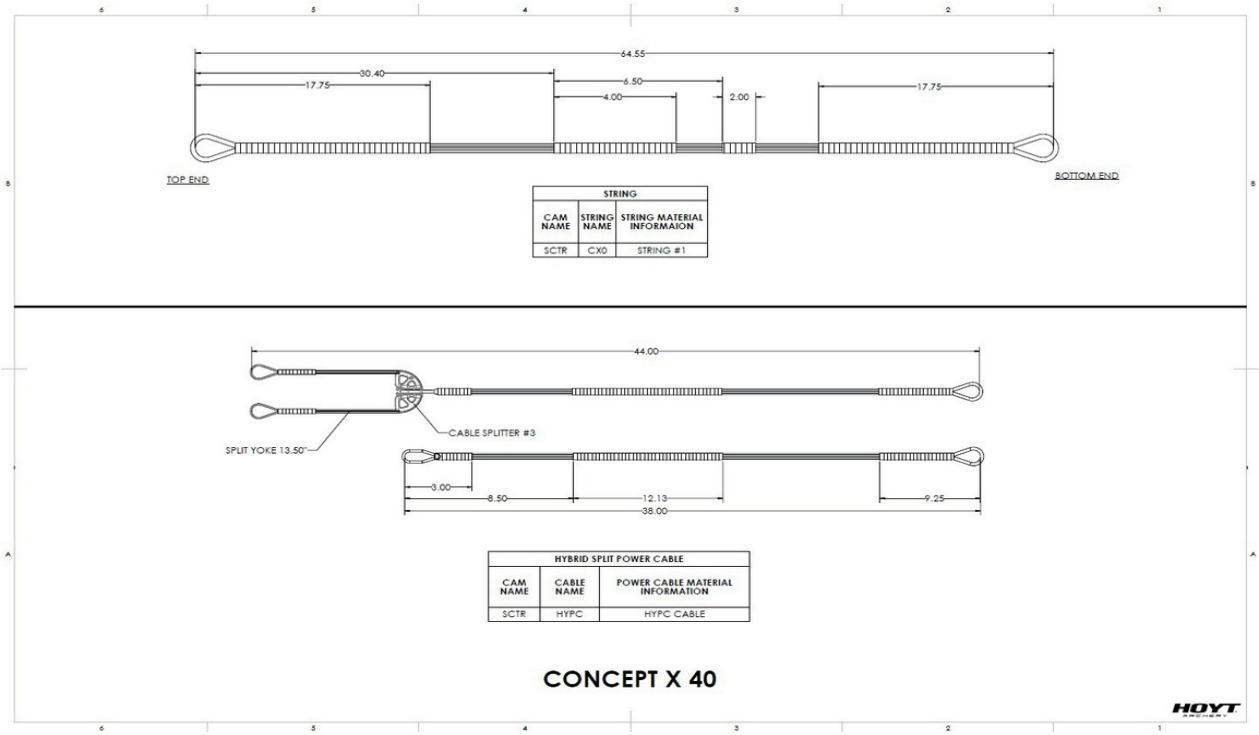

Concept FX - TXL Limbs - SCTR Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	HYPC
CDM Cam -	65%-75%	6 1/4	34 1/8	27 1/2	E*	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	27	F	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26 1/2	G	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26	H	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25 1/2	I	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25	J	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	24 1/2	K	One Size	58.45	38.00

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	HYPC
SCTR Cam - SPEC Modules	65%-75%	6 1/4	34 1/8	29 1/2	A	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	29 1/4	A-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	29 1/4	B+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	29	B	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	28 3/4	B-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	28 3/4	C+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	28 1/2	C	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	28 1/4	C-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	28 1/4	D+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	28	D	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	27 3/4	D-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	27 3/4	E+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	27 1/2	E	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	27 1/4	E-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	27 1/4	F+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	27	F	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26 3/4	F-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26 3/4	G+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26 1/2	G	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26 1/4	G-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26 1/4	H+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	26	H	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25 3/4	H-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25 3/4	I+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25 3/4	I	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25 1/2	I-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25 1/4	J+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25 1/4	J	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	25	J-	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	24 3/4	J+	One Size	58.45	38.00
	65%-75%	6 1/4	34 1/8	24 3/4	K+	One Size	58.45	38.00

65%-75%	6 1/4	34 1/8	24 1/2	K	One Size	58.45	38.00
65%-75%	6 1/4	34 1/8	24 1/4	K-	One Size	58.45	38.00
65%-75%	6 1/4	34 1/8	24 1/4	L+	One Size	58.45	38.00
65%-75%	6 1/4	34 1/8	24 23	L	One Size	58.45	38.00
65%-75%	6 1/4	34 1/8	3/4 23	L-	One Size	58.45	38.00
65%-75%	6 1/4	34 1/8	3/4 23	M+	One Size	58.45	38.00
65%-75%	6 1/4	34 1/8	1/2 23	M	One Size	58.45	38.00
65%-75%	6 1/4	34 1/8	1/4	M-	One Size	58.45	38.00

*=Shipped Module Position

Model: Concept FX

Model Year: 2025

Pocket: B6

Pocket Dowel: B2

Rocker: 21

Limb: TXL


Limb Bolt Length: 1.75" SHCS

Roller Mount #30

Stealth Shot Bar: 4.00"

String Model: CX0

Date: 4/22/25

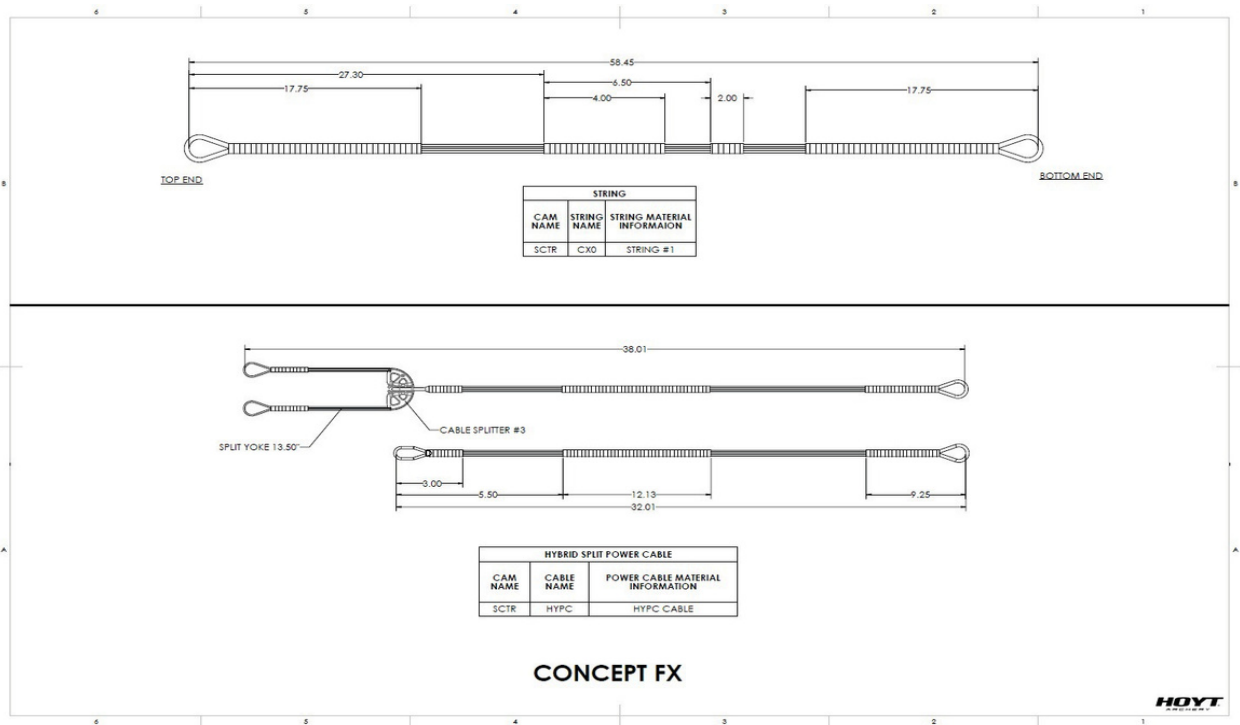


AX-2 29 - AXL Limbs - HBX Gen 4 Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE SIZE	MODULE POSITION	CAM SIZE	STRING	HYPC
HBX Gen 4 Cam	75%-85%	6 7/16	29 9/16	30 29	5 5 5	A	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	3/4 29	5 4 4	a	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	1/2 29	4 4 3	B	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	1/4 29	3 3 3	b	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	28 3/4	2 2 2	C	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	28 1/2	2 1 1	c	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	28 1/4	1 1 1	D	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	28 27		d	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	3/4 27		E	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	1/2 27		e	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	1/4 27		F	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	26 3/4		f	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	26 1/2		G	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	26 1/4		g	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	26 25		H	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	3/4 25		h	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	1/2 25		I	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16	1/4 25		i	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16			J	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16			j	One Size	57.45	33.30
	75%-85%	6 7/16	29 9/16			K	One Size	57.45	33.30

*=Shipped Module Position
Model: AX-2 29
Model Year: 2025

Pocket: B6
Pocket Dowel: B2
Rocker: 21
Limb: AXL
Limb Bolt Length: 1.75" SHCS
Roller Mount #28

Stealth Shot Bar: 4.25"
String Model: AX4
Date: 12/18/24

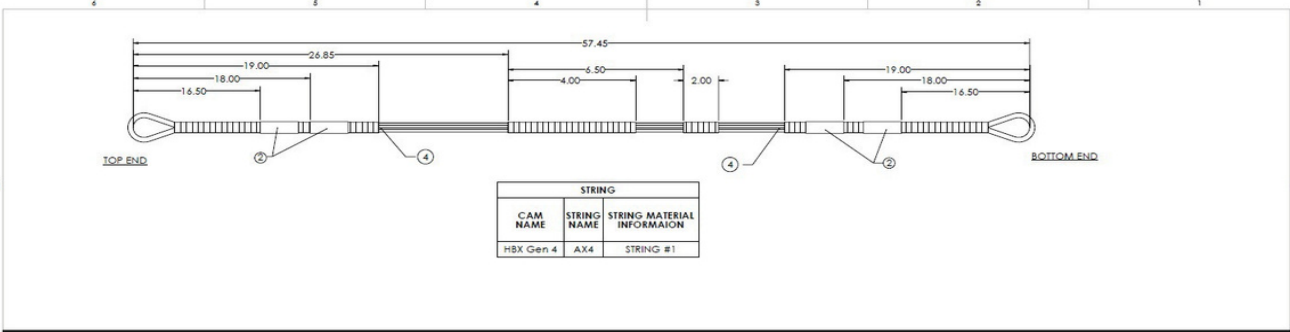

AX-2 32 - AXL Limbs - HBX Gen 4 Cams


CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE SIZE	MODULE POSITION	CAM SIZE	STRING	HYPC
HBX Gen 4 Cam	75%-85%	6 11/16	32 9/16	31 30	5 5	A	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	3/4	5	a	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	30 1/2	5	B	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	30 1/4	4	b	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	30	4	C	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	29 3/4	4	c	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	29 1/2	4	D	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	29 1/4	3	d	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	29	3	E	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	28 3/4	3	e	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	28 1/2	3	F	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	28 1/4	2	f	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	28	2	G	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	27 3/4	2	g	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	27 1/2	2	H	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	27 1/4	1	h	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	27	1	I	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	26 3/4	1	i	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	26 1/2	1	J	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	26 1/4	1	J	One Size	60.50	36.25
	75%-85%	6 11/16	32 9/16	26		K	One Size	60.50	36.25

*=Shipped Module Position
Model: AX-2 32
Model Year: 2025

Pocket: B6
Pocket Dowel: B2
Rocker: 21

Limb: AXL
Limb Bolt Length: 1.75" SHCS
Roller Mount #28

Stealth Shot Bar: 4.25"
String Model: AX4
Date: 12/19/24

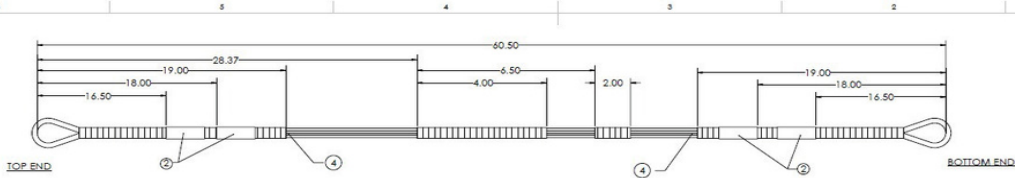

Tune Chart_AX-2 32 Z Tune Chart 2025


RX-9 - AXL Limbs - HBX Gen 4 Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE SIZE	MODULE POSITION	CAM SIZE	STRING	HYPC
HBX Gen 4 Cam	75%-85%	6 1/8	30 9/16	30 29	5 5 5	A	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	3/4 29	5 4 4	a	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	1/2 29	4 4 3	B	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	1/4 29	3 3 3	b	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	28 3/4	2 2 2	C	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	28 1/2	2 1 1	c	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	28 1/4	1 1 1	D	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	28 27		d	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	3/4 27		E	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	1/2 27		e	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	1/4 27		F	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	26 3/4		f	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	26 1/2		G	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	26 1/4		g	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	26 25		H	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	3/4 25		h	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	1/2 25		I	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16	1/4 25		i	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16			J	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16			j	One Size	58.50	34.30
	75%-85%	6 1/8	30 9/16			K	One Size	58.50	34.30

*=Shipped Module Position
Model: RX-9
Model Year: 2025

Pocket: B6
Pocket Dowel: B2
Rocker: 21
Limb: AXL
Limb Bolt Length: 1.75" SHCS
Roller Mount #29

Stealth Shot Bar: 3.5"
String Model: VT4
Date: 12/19/24

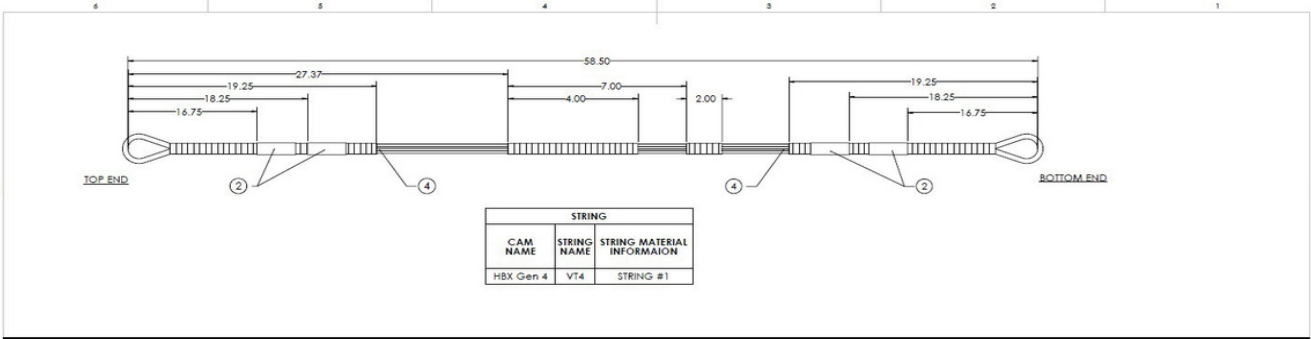

RX-9 Ultra - AXL Limbs - HBX Gen 4 Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE SIZE	MODULE POSITION	CAM SIZE	STRING	HYPC
HBX Gen 4 Cam	75%-85%	6 7/16	33 9/16	31 30	5 5 5	A	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	3/4 30	5 4 4	a	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	1/2 30	4 4 3	B	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	1/4 30	3 3 3	b	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	29 3/4	2 2 2	C	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	29 1/2	2 1 1	c	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	29 1/4	1 1 1	D	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	29 28		d	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	3/4 28		E	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	1/2 28		e	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	1/4 28		F	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	27 3/4		f	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	27 1/2		G	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	27 1/4		g	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	27 26		H	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	3/4 26		h	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	1/2 26		I	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16	1/4 26		i	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16			J	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16			j	One Size	61.50	37.25
	75%-85%	6 7/16	33 9/16			K	One Size	61.50	37.25

*=Shipped Module Position

Model: RX-9 Ultra

Model Year: 2025

Pocket: B6

Pocket Dowel: B2

Rocker: 21

Limb: AXL


Limb Bolt Length: 1.75" SHCS

Roller Mount #29

Stealth Shot Bar: 3.5"

String Model: VT4

Date: 12/19/24

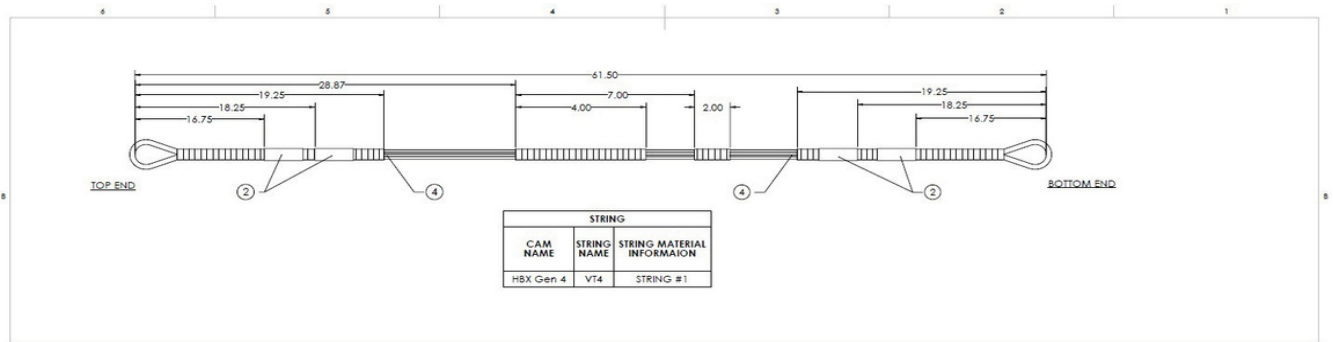

RX9 SD - AXL Limbs - HBX SD Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE SIZE	MODULE POSITION	CAM SIZE	STRING	HYPC
HBX SD Cam	80%	5 3/4	30 1/2	27	SD	A	One Size	55.00	34.20
	80%	5 3/4	30 1/2	26 1/2	SD	B	One Size	55.00	34.20
	80%	5 3/4	30 1/2	26	SD	C	One Size	55.00	34.20
	80%	5 3/4	30 1/2	25 1/2	SD	D	One Size	55.00	34.20
	80%	5 3/4	30 1/2	25	SD	E	One Size	55.00	34.20
	80%	5 3/4	30 1/2	24 1/2	SD	F	One Size	55.00	34.20
	80%	5 3/4	30 1/2	24	SD	G	One Size	55.00	34.20
	80%	5 3/4	30 1/2	23 1/2	SD	H	One Size	55.00	34.20
	80%	5 3/4	30 1/2	23	SD	I	One Size	55.00	34.20

*=Shipped Module Position

Model: RX-9 SD

Model Year: 2025

Pocket: B6

Pocket Dowel: B2

Rocker: 21

Limb: AXL


Limb Bolt Length: 1.75" SHCS

Roller Mount #29

Stealth Shot Bar: 3.5"

String Model: RS4

Date: 1/17/25

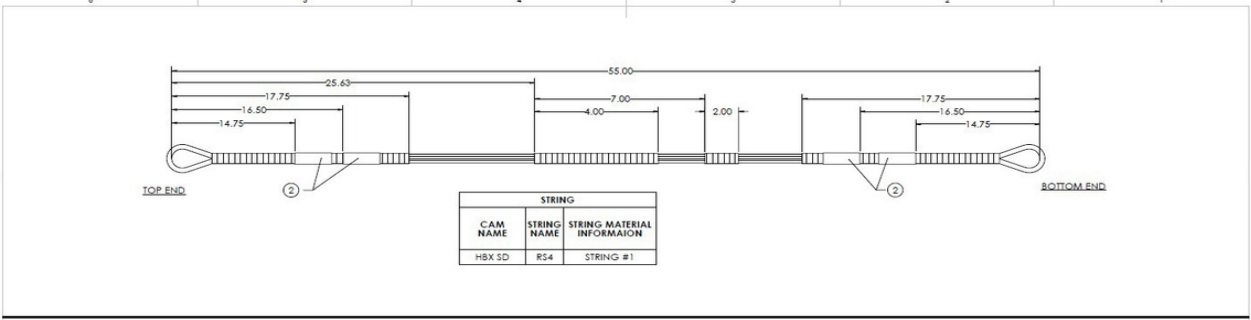

AX-2 SD - AXL Limbs - HBX SD Cams


CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE SIZE	MODULE POSITION	CAM SIZE	STRING	HYPC
HBX SD Cam	80%	6	29 1/2	27	SD	A	One Size	54.00	33.30
	80%	6	29 1/2	26 1/2	SD	B	One Size	54.00	33.30
	80%	6	29 1/2	26	SD	C	One Size	54.00	33.30
	80%	6	29 1/2	25 1/2	SD	D	One Size	54.00	33.30
	80%	6	29 1/2	25	SD	E	One Size	54.00	33.30
	80%	6	29 1/2	24 1/2	SD	F	One Size	54.00	33.30
	80%	6	29 1/2	24	SD	G	One Size	54.00	33.30
	80%	6	29 1/2	23 1/2	SD	H	One Size	54.00	33.30
	80%	6	29 1/2	23	SD	I	One Size	54.00	33.30

*=Shipped Module Position
Model: AX-2 29 SD
Model Year: 2025

Pocket: B6
Pocket Dowel: B2
Rocker: 21

Limb: AXL
Limb Bolt Length: 1.75" SHCS
Roller Mount #28

Stealth Shot Bar: 3.75"
String Model: CX4
Date: 12/19/24

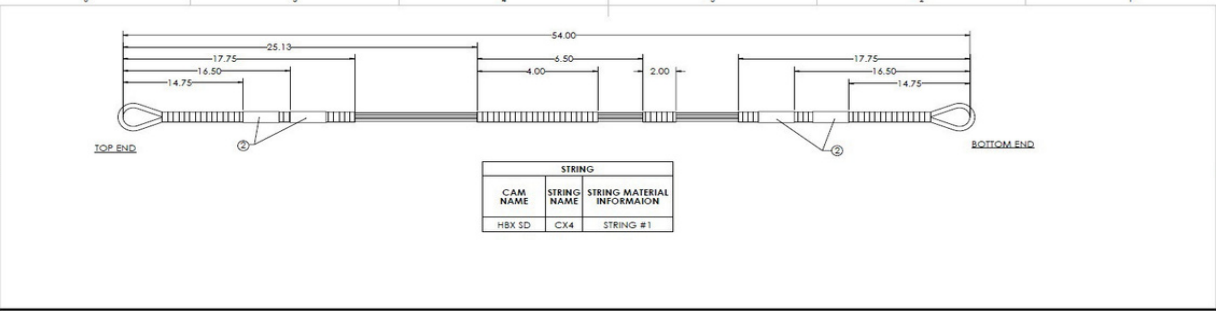

RX-9 Ultra LD - TXL Limbs - HBX Gen 4 Cams

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE SIZE	MODULE POSITION	CAM SIZE	STRING	HYPC
HBX Gen 4 Cam	75%-85%	7 3/8	33 5/16	32 31	5 5 5	A	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	3/4 31	5 4 4	a	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	1/2 31	4 4 3	B	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	1/4 31	3 3 3	b	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	30 3/4	2 2 2	C	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	30 1/2	2 1 1	c	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	30 1/4	1 1 1	D	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	30 29		d	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	3/4 29		E	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	1/2 29		e	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	1/4 29		F	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	28 3/4		f	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	28 1/2		G	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	28 1/4		g	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	28 27		H	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	3/4 27		h	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	1/2 27		I	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16	1/4 27		i	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16			J	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16			j	One Size	61.00	37.20
	75%-85%	7 3/8	33 5/16			K	One Size	61.00	37.20

*=Shipped Module Position

Model: RX-9 Ultra LD

Model Year: 2025

Pocket: B6

Pocket Dowel: B2

Rocker: 21

Limb: TXL


Limb Bolt Length: 1.75" SHCS

Roller Mount #24

Stealth Shot Bar: 4.5"

String Model: VT4

Date: 4/22/25

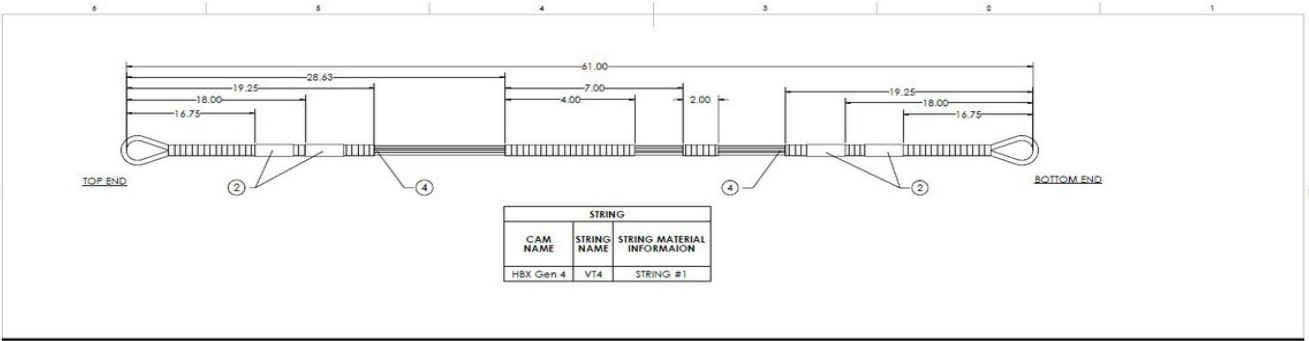

Alpha X 30 - AXL Limbs - HBX Xact Cams

CAM	LOW LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MOD	MODULE POSITION	BASE CAM	STRING	POWER CABLE
HBX Xact	75%-85%	6 3/16	30 3/8	25 25	1	K	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	1/4 25	1	j	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	1/2 25	1	J	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	3/4 26	1	i	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	26 1/4	1	*I	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	26 1/2	2	h	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	26 3/4	2	H	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	27 27	2	g	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	1/4 27	2	G	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	1/2 27	2	f	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	3/4 28	2	F	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	28 1/4	2	e	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	28 1/2	2	*E	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	28 3/4	3	d	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	29 29	3	D	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	1/4 29	3	c	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	1/2 29	3	*C	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8	3/4 30	3	b	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8		3	B	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8		3	a	One Size	58.35	34.20
	75%-85%	6 3/16	30 3/8		3	A	One Size	58.35	34.20

*=Shipped Module Position

Model: Alpha X 30

Model Year: 2024

Limb: AXL

Pocket: B2

Pocket Dowel: B2

Rocker: 21

Limb Bolt Length: 1.75" SHCS

Roller Mount #28

Stealth Shot Bar: 5.00"

Shock Pod: #2

String Model: AX4

Date: 10/11/23

Alpha X 33 - AXL Limbs - HBX Xact Cams

CAM	LOW LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MOD	MODULE POSITION	BASE CAM	STRING	POWER CABLE
HBX Xact	75%-85%	6 7/16	33 7/16	26 26	1	K	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	1/4 26	1	j	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	1/2 26	1	J	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	3/4 27	1	i	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	27 1/4	1	*I	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	27 1/2	2	h	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	27 3/4	2	H	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	28 28	2	g	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	1/4 28	2	G	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	1/2 28	2	f	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	3/4 29	2	F	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	29 1/4	2	e	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	29 1/2	2	*E	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	29 3/4	3	d	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	30 30	3	D	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	1/4 30	3	c	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	1/2 30	3	*C	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16	3/4 31	3	b	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16		3	B	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16		3	a	One Size	61.35	37.20
	75%-85%	6 7/16	33 7/16		3	A	One Size	61.35	37.20

*=Shipped Module Position
Model: Alpha X 33
Model Year: 2024
Limb: AXL

Pocket: B2
Pocket Dowel: B2
Rocker: 21

Limb Bolt Length: 1.75" SHCS
Roller Mount #28
Stealth Shot Bar: 5.25"

Shock Pod: #2
String Model: AX4

Date: 10/12/23

RX 8 - RXL Limbs - HBX Xact Cams

CAM	LOW LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MOD	MODULE POSITION	BASE CAM	STRING	POWER CABLE
HBX Xact	75%-85%	6 1/8	30 1/2	25 25	1	K	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	1/4 25	1	j	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	1/2 25	1	J	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	3/4 26	1	i	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	26 1/4	1	*I	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	26 1/2	2	h	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	26 3/4	2	H	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	27 27	2	g	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	1/4 27	2	G	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	1/2 27	2	f	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	3/4 28	2	F	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	28 1/4	2	e	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	28 1/2	2	*E	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	28 3/4	3	d	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	29 29	3	D	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	1/4 29	3	c	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	1/2 29	3	*C	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2	3/4 30	3	b	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2		3	B	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2		3	a	One Size	58.40	34.35
	75%-85%	6 1/8	30 1/2		3	A	One Size	58.40	34.35

*=Shipped Module Position
Model: RX 8
Model Year: 2024
Limb: RXL

Pocket: B3
Pocket Dowel: B2
Rocker: 21

Limb Bolt Length: 1.75" SHCS
Roller Mount #29
Stealth Shot Bar: 3.50"

String Model: VT4

Date: 10/12/23

Kobalt - 511 Limb - KB Cam & IG+ Cam

CAM	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	BASE CAM	STRING	POWER CABLE	45 LB	Actual W eight
Kobalt (KB) & (IG+)	6 7/8	29 1/4	18	18	One Size	50.00	31.30	135	22
	6 7/8	29 1/4	19	19	One Size	50.00	31.30	135	25
	6 7/8	29 1/4	20	20	One Size	50.00	31.30	135	29
	6 7/8	29 1/4	21	21	One Size	50.00	31.30	135	32
	6 7/8	29 1/4	22	22	One Size	50.00	31.30	135	35
	6 7/8	29 1/4	23	23*	One Size	50.00	31.30	135	38
	6 7/8	29 1/4	24	24	One Size	50.00	31.30	135	40
	6 7/8	29 1/4	25	25	One Size	50.00	31.30	135	41
	6 7/8	29 1/4	26	26	One Size	50.00	31.30	135	43
	6 7/8	29 1/4	27	27	One Size	50.00	31.30	135	44
	6 7/8	29 1/4	28	28	One Size	50.00	31.30	135	45

Model: Kobalt
Model Year: 2023
*Shipped Module Position

Limb: 511
Cable Guard Bar: 7.50"
Stealth Shot Bar: 5.00"

Pocket: #52
Rocker: #11
Pocket Dowel: #8

Limb Bolt Length: 2.25
String Model: KB0
Date: 8/11/22

VTM 34 - Hybrid 12" EXT - HBX Pro

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	BASE CAM	STRING	POWER CABLE
HBX Pro	80%-85%	6 1/8	33 3/4	26	K	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	26 1/2	J	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	27	I	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	27 1/2	H	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	28	G	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	28 1/2	F	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	29	E	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	29 1/2	D	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	30	C	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	30 1/2	B	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	31	A	One Size	61.20	37.90
	80%-85%	6 1/8	33 3/4	31	A	One Size	61.20	37.90

*Shipped Module Position

Model: VTM 34

Model Year: 2023

Limb: Hybrid 12" EXT

Pocket: B1

Pocket Dowel: B1

Rocker: 18 & 19

Limb Bolt Length: 1.75" SHCS

Roller Mount #22

Stealth Shot Bar: 4.75"

Limb Shox: #8

Shock Pod: #2

String Model: VT4

Date: 11/10/22

Stratos 40 - 12" Hybrid EXT Lollipop - HBT

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	MODULE SIZE	CAM SIZE	STRING	POWER CABLE
HBT 2	65 / 70 / 75%	7 7/16	40 3/4	32	A	2.2	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	31 3/4	a	2.2	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	31 1/2	B	2.2	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	31 1/4	b	2.2	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	31	C	2.2	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	30 3/4	c	2.2	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	30 1/2	*D	2.1	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	30 1/4	d	2.1	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	30	E	2.1	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	29 3/4	e	2.1	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	29 1/2	F	2.1	2	62.85	44.40
	65 / 70 / 75%	7 7/16	40 3/4	29 1/4	f	2.1	2	62.85	44.40

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	MODULE SIZE	CAM SIZE	STRING	POWER CABLE
HBT 1	65 / 70 / 75%	7 5/16	40 5/8	29	A	1.2	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	28 3/4	a	1.2	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	28 1/2	B	1.2	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	28 1/4	b	1.2	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	28	C	1.2	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	27 3/4	c	1.2	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	27 1/2	*D	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	27 1/4	d	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	27	E	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	26 3/4	e	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	26 1/2	F	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	26 1/4	f	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	26	G	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	25 3/4	g	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	25 1/2	H	1.1	1	60.00	43.85
	65 / 70 / 75%	7 5/16	40 5/8	25 1/4	h	1.1	1	60.00	43.85

Stratos 40 - 12" Hybrid EXT lollipop - SVX-W

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	CONTROL CABLE	BUSS CABLE
SVX-W	70.0%	7 1/8 7	38 15/16	24 1/2	A	1	57.40	44.40	40.90
	70.0%	1/8	38 15/16	25	B	1	57.40	44.40	40.90
	70.0%	7 1/8 7	38 15/16	25 1/2	*C	1	57.40	44.40	40.90
	70.0%	1/8 7	38 15/16	26	D	1	57.40	44.40	40.90
	70.0%	1/8 7	38 15/16	26 1/2	E	1	57.40	44.40	40.90
	70.0%	1/8 7	39 9/16	27	A	2	59.45	43.45	41.45
	70.0%	1/8 7	39 9/16	27 1/2	B	2	59.45	43.45	41.45
	70.0%	1/8 7	39 9/16	28	*C	2	59.45	43.45	41.45
	70.0%	1/8 7	39 3/4	28 1/2	A	3	61.45	43.55	41.20
	70.0%	1/8 7	39 3/4	29	B	3	61.45	43.55	41.20
	70.0%	1/8 7	39 3/4	29 1/2	*C	3	61.45	43.55	41.20
	70.0%	1/16 7	40 1/8	30	A	4	63.20	43.95	41.80
	70.0%	1/16 7	40 1/8	30 1/2	B	4	63.20	43.95	41.80
	70.0%	1/16 6	40 1/8	31	*C	4	63.20	43.95	41.80
	70.0%	15/16 6	40 11/16	31 1/2	A	5	65.15	44.65	42.30
	70.0%	15/16	40 11/16	32	*B	5	65.15	44.65	42.30

*=Shipped Module Position

Model Year: 2023 Model:
Stratos 40 Limb: 12" Hybrid
EXT Lollipop

Pocket: B1
Pocket Dowel: B1
Rocker: 18 & 19

Limb Bolt Length: 1.75" SHCS
Cable Guard Bar: 6.50"
Stealth Shot Bar HBT 2: 4.50"
Stealth Shot Bar HBT 1: 4.75"

Limb Shox: N/A
Shock Pod: #2
String Model: IN2

Date: 4/17/23

Z1S - Hybrid 12" EXT - S Type

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	BASE CAM	STRING	POWER CABLE
S Type	80%-85%	6	33	25	K	One Size	58.80	37.15
	80%-85%	6	33	25 1/2	J	One Size	58.80	37.15
	80%-85%	6	33	26	I	One Size	58.80	37.15
	80%-85%	6	33	26 1/2	H	One Size	58.80	37.15
	80%-85%	6	33	27	G	One Size	58.80	37.15
	80%-85%	6	33	27 1/2	F	One Size	58.80	37.15
	80%-85%	6	33	28	*E	One Size	58.80	37.15
	80%-85%	6	33	28 1/2	D	One Size	58.80	37.15
	80%-85%	6	33	29	*C	One Size	58.80	37.15
	80%-85%	6	33	29 1/2	B	One Size	58.80	37.15
	80%-85%	6	33	30	A	One Size	58.80	37.15

*=Shipped Module Position

Model: Z1S

Model Year: 2023

Limb: Hybrid 12" EXT

Pocket: B1

Pocket Dowel: B1

Rocker: 18 & 19

Limb Bolt Length: 1.75" SHCS

Roller Mount #22

Stealth Shot Bar: 4.50"

Limb Shox: #8

Shock Pod: #2

String Model: TT4

Date: 11/10/22

Highline - Hybrid 12" EXT - HBX Pro

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	BASE CAM	STRING	POWER CABLE
HBX Pro	80%-85%	8	36.375	29	K	One Size	64.10	40.35
	80%-85%	8	36.375	29 1/2	J	One Size	64.10	40.35
	80%-85%	8	36.375	30	I	One Size	64.10	40.35
	80%-85%	8	36.375	30 1/2	H	One Size	64.10	40.35
	80%-85%	8	36.375	31	G	One Size	64.10	40.35
	80%-85%	8	36.375	31 1/2	F	One Size	64.10	40.35
	80%-85%	8	36.375	32	*E	One Size	64.10	40.35
	80%-85%	8	36.375	32 1/2	D	One Size	64.10	40.35
	80%-85%	8	36.375	33	*C	One Size	64.10	40.35
	80%-85%	8	36.375	33 1/2	B	One Size	64.10	40.35
	80%-85%	8	36.375	34	A	One Size	64.10	40.35

Model: Highline
Model Year: 2022
*=Shipped Module Position
Pocket: B1
Pocket Dowel: B1

Limb: Hybrid 12" EXT
Roller Mount #25
Limb Shox #8
String Model: V36

Stealth Shot Bar: 6.00"
Rocker: #18 & #19
Limb Bolt Length: 1.75
Date: 12/9/21

Torrex - .875 - Torrex Cam

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	BASE CAM	ST RING	CONTROL CABLE	BUSS CABLE	CAM FAMILY
TRX #3	80%	7	30 3/4	26	B	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	26.5	C	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	27	D	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	27.5	E	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	28	F	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	28.5	G	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	29	H	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	29.5	I	3	54.35	33.25	32.00	TRX
	80%	7	30 3/4	30				33.25	32.00	TRX

Model: Torrex
Model Year: 2022

Limb: .875
Limb shox #3.1

Stealth shot bar: 5.00
Cable guard bar length: 5.50

Pocket: #53
Rocker: none

Limb Bolt: #2 Dished
String model: TR8

Date: 5/3/22

Torrex XT - Hybrid 11" EXT HD - Torrex XT Cam

CAM	LET OFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LEN GT H	MODULE POSIT ION	BASE CAM	STRING	CONTROL CABLE	BUSS CABLE	CAM FAMILY
TXT #3	80%	6	30	25.5	A	3	55.30	32.65	31.40	TXT
	80%	6	30	26	B	3	55.30	32.65	31.40	TXT
	80%	6	30	26.5	C	3	55.30	32.65	31.40	TXT
	80%	6	30	27	D	3	55.30	32.65	31.40	TXT
	80%	6	30	27.5	E	3	55.30	32.65	31.40	TXT
	80%	6	30	28	F	3	55.30	32.65	31.40	TXT
	80%	6	30	28.5	G	3	55.30	32.65	31.40	TXT
	80%	6	30	29	H	3	55.30	32.65	31.40	TXT
	80%	6	30	29.5	I	3	55.30	32.65	31.40	TXT
	80%	6	30	30	J	3	55.30	32.65	31.40	TXT

Model: Torrex XT
Model Year: 2022
Limb Bolt: #2 Dished
Rocker: none

Limb: Hybrid EXT 11" HD
String model: TR8
Date: 12/9/21

Stealth shot bar: 5.00
Limb shox #3.1

Pocket: #54
Roller Mount #20

Torrex XT LD - Hybrid 12" EXT - Torrex XT Cam

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	BASE CAM	ST RING	CONTROL CABLE	BUSS CABLE	CAM FAMILY
#EXT	50%	7	30	30.5	I	3	55.15	33.30	32.10	TX1
	80%	7	30	31	J	3	55.15	33.30	32.10	TX1

Model: Torrex XT LD
Model Year: 2022
Limb Bolt: #2 Dished
String model: TR8

Limb: Hybrid 12" EXT
Limb shox #3.1
Date: 12/9/21

Stealth shot bar: 5.75
Roller Mount #20

Pocket: #54
Rocker: none

Torrex - .875 - Torrex Cam

CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	BASE CAM	STRING	CONTROL CABLE	BUSS CABLE	CAM FAMILY
TRX #3	80%	7	30 3/4	26	A	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	26.5	B	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	27	C	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	27.5	D	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	28	E	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	28.5	F	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	29	G	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	29.5	H	3	54.35	33.15	32.00	TRX
	80%	7	30 3/4	30	I	3	54.35	33.15	32.00	TRX

Model: Torrex
Model Year: 2022
Limb Bolt: #2 Dished
String model: TR8

Limb: .875
Limb shox #3.1
Date: 12/9/21

Stealth shot bar: 5.00
Cable guard bar length: 5.50

Pocket: #53
Rocker: none